


JProbeC166

The Modular Tool Chain C166CBC

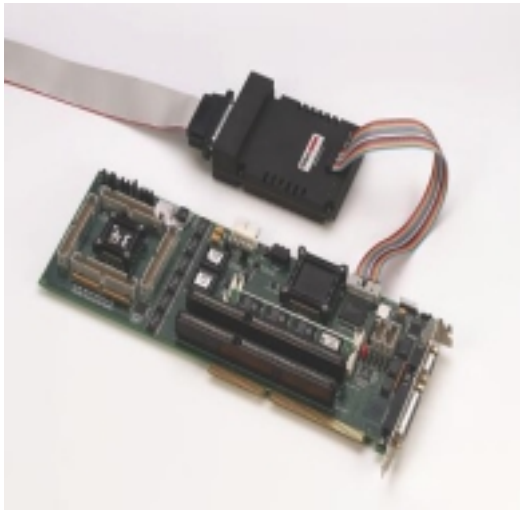

The OCDS Debug Solution

The strategy for the C166CBC toolchain utilizes the capabilities of OCDS - the On Chip Debug Support provided by Infineon Technologies. Hitex offers a universal solution for Infineon's C166CBC family. The system is also prepared for upcoming derivatives with C166S core. The main benefits of this product line are ease-of-use and versatility.

Our proprietary user interface HiTOP supports very sophisticated HLL-Debugging and allows an easy transition between different types of tools and CPU platforms.

Entry-Level: JProbeC166

This JProbe for C166CBC starts with an entry-level solution that utilizes the JTAG-Port and exploits the entire

OCDS functionality. Our well-known HiTOP debugger offers software breakpoints, OCDS hardware breakpoints and implements Fastbreaks for on-the-fly access to any memory and internal register. In order to establish a fast link to the target system, the JTAG connection is linked via the host PC's LPT port. A JTAG connector has to be provided to the target hardware. Where no JTAG-connector can be provided, we also offer a direct adaptation to the footprint of the C166CBC chip via our patented PressOn technology. This avoids the need for additional space to accommodate a JTAG-connector on the PCB - especially suited for debugging of production units.

The Operating Environments

The product shares the same user interface which is unique among all Hitex products. HiTOP supports all leading compilers and their object formats. Many third-party tools are well integrated with HiTOP because of the acceptance of HiTOP as standard emulation control software. Different RTOSs are supported through display of task-lists and task-sensitive debugging.

High-End DProbe C166CBC

As a next step, a dedicated DProbe C166CBC with extended Trace and Break functionality is in preparation.

Highlights!

- Sophisticated HLL-debugging software:
 - easy to use
 - watch/examine for variables
 - full-blown symbol manager
 - batch/macro file processing
 - on-line help function
 - generator for creating user-defined windows
- Fast break for on-the-fly access
- 5 Volt / 3 Volt / 2.5 Volt Support
- Interface between PC and target via JTAG cable
- Alternatively adaptation via Hitex PressOn Adapter
- Virtually unlimited software breakpoints
- OCDS hardware breakpoints
- Task-specific debugging
- Initially supported Controllers:
 - C165H, E-GOLD, SDA6000
- USB Controller:
 - C165UTAH, C161U

Hitex Development Tools

available worldwide

www.hitex.com / www.hitex.de

Hitex Germany

Greschbachstraße 12
D-76229 Karlsruhe
Tel. +49-721-9628-0
Fax +49-721-9628-149
E-mail sales@hitex.de

Hitex USA

710 Lakeway Drive
Suite 280
Sunnyvale, CA 94086
Tel. (800) 45HITEX
Tel. +1-408-7337080
Fax +1-408-7336320
E-mail info@hitex.com

Hitex Asia

25, International
Business Park
#04-62A German Centre
Singapore 609916
Tel. +65-566-7919
Fax +65-563-7539
E-mail sales@hitexasia.com.sg

Branch Office Germany

Oskar-von-Miller-Str. 1a
D-85386 Eching
Tel. +49-8165-6175-0
Fax +49-8165-6175-449


Hitex UK

Warwick University,
Science Park
Sir William Lyons Road
GB-Coventry CV4 7EZ
Tel. +44-24 76-692066
Fax +44-24 76-692131
E-mail Sales@hitex.co.uk

International Sales

Tel. +49-721-9628-133
Fax +49-721-9628-149
E-mail Sales@hitex.de

Our Partner



This brochure is intended to give overview information only. Since our policy is one of continuing development, changes and technical enhancements are possible. Trademarks of other companies used in the text refer exclusively to the products of these companies. Hitex and HiTOP are registered trademarks of Hitex.

See our web sites for current distributor list!